



LOWRANCE
26.1 Software Update
Release Notes

LOWRANCE®

26.1 SOFTWARE RELEASE HIGHLIGHTS

New with 26.1:

- ActiveTarget[®] 2 XL support
- ActiveTarget[®] Improvements
 - Beam Indicator accuracy
 - Image quality with Noise Rejection set to “Off”
 - Auto ranging when manual range was manually set is fixed
- Other Improvements
 - Improved sonar returns on select AIRMAR[®] Chirp transducers
 - SideScan and DownScan Imaging[™] now available from StructureScan[®] 3D transducers on Simrad[®] NSX[®] and NSS[®] 4 multi-functions displays
 - Fixed bug asking to change the chart data selection every time after reboot when multiple C-MAP charts were loaded on the same SD card



ActiveTarget[®] 2 XL
Support



LOWRANCE[®]

ACTIVETARGET[®] 2 XL SUPPORT

New with 26.1 is support for the all-new ActiveTarget[®] 2 XL System:


- **Best-In-Class Resolution:**
 - Our live sonar resolution was already best in class. Now, it's even sharper..
- **Largest Field of Vision**
 - Leave nothing unseen with a full 180° XL live view across Forward, Down, and Scout modes all from a single transducer
- **Quick-Switch Views**
 - For the first time, switch instantly between Forward XL and Down XL views on your display. No need to go fishing for your transducer. Just select your preferred view, and fish.
- **Scout Live 360 in Dual Paired Mode**
 - Combine two systems to unlock an industry-first 360° Scout XL live view around your boat*.
**Two sonar modules and two transducers required. HDS PRO only*
- **Easy Upgrade**
 - Compatibility with the existing ActiveTarget 2 sonar module means upgrading has never been easier.

ACTIVETARGET® 2 XL | ON SCREEN MODE CHANGE

Switching between Forward XL and Down XL Views is as simple as selecting “Mode” option on the Menu Sidebar on the main ActiveTarget panel.


Note: When the Mode is set to “Auto” and the Transducer is in Forward/Down XL orientation, the default Mode is set to “Forward”.

Unlike ActiveTarget® & ActiveTarget® 2, switching between these two modes does not require changing the orientation of the transducer which adds benefit to the user’s experience.

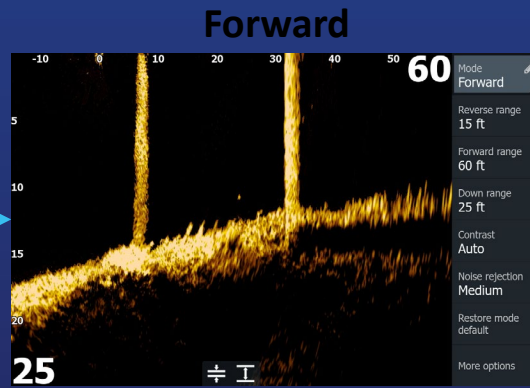

ACTIVETARGET® 2 XL | TOTAL VISIBILITY

Reverse range was introduced in the last software release. Utilizing Reverse Range, Forward Range and Down Range allow for full control to see your bait and fish anywhere in the scene.

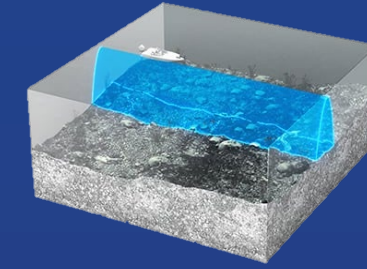


Forward XL

Starting from a zero point in the top left corner, maximize your forward view by reducing the reverse range






Down XL

Starting from a zero point at the top center of the screen, highlight the sonar data in front, below and behind the transducer for optimum vertical bait presentation

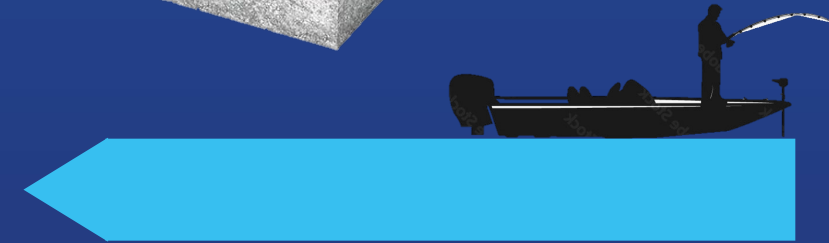

Reverse XL

Increasing the reverse range uncovers more of the scene behind the transducer, expanding your viewing area behind you

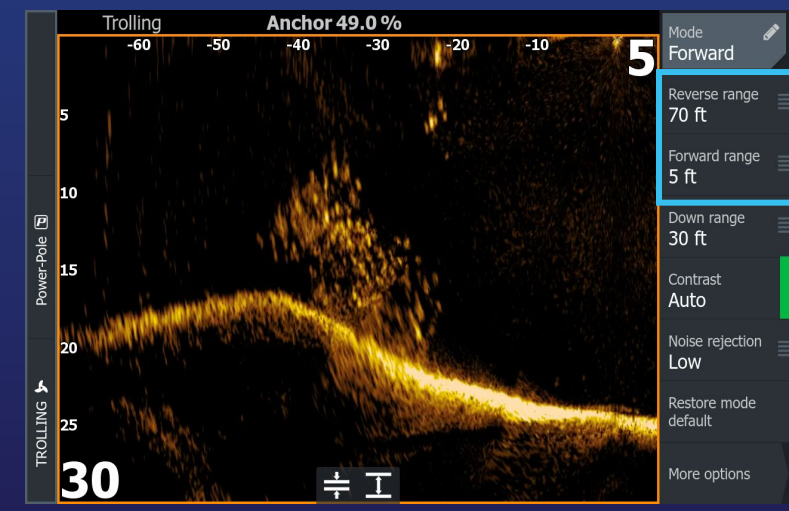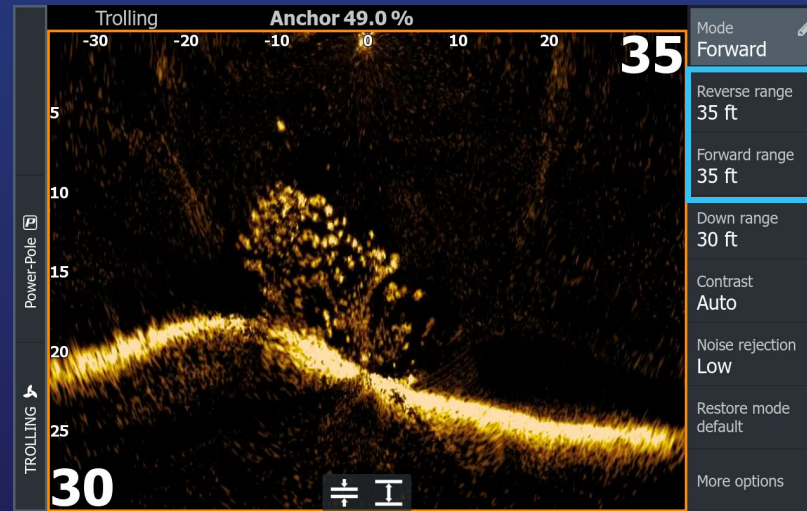
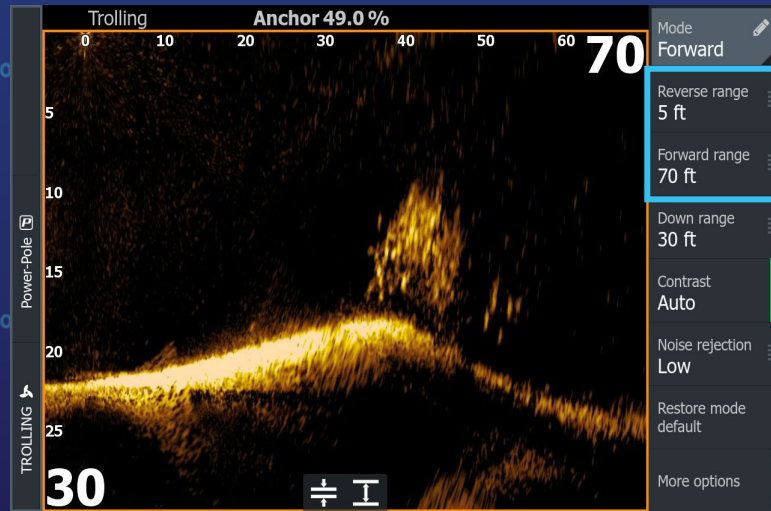


ACTIVETARGET[®] 2 XL | DEPTH OFFSET

When an ActiveTarget[®] transducer is installed, the transducer will be below the water surface.

Depth offset, found in the ActiveTarget Installation Menu, allows the user to compensate for water column data above the transducer that is not shown on the display. In Forward mode, when the proper depth offset distance is applied, the water column data between the transducer and water surface is shown, allowing visibility up to the water surface.

The amount of extra data above the transducer is dependent on the surface temperature of the water. In colder water conditions, there is less data available above the transducer, meaning the viewable portion of the surface occurs at a farther distance away from the transducer.

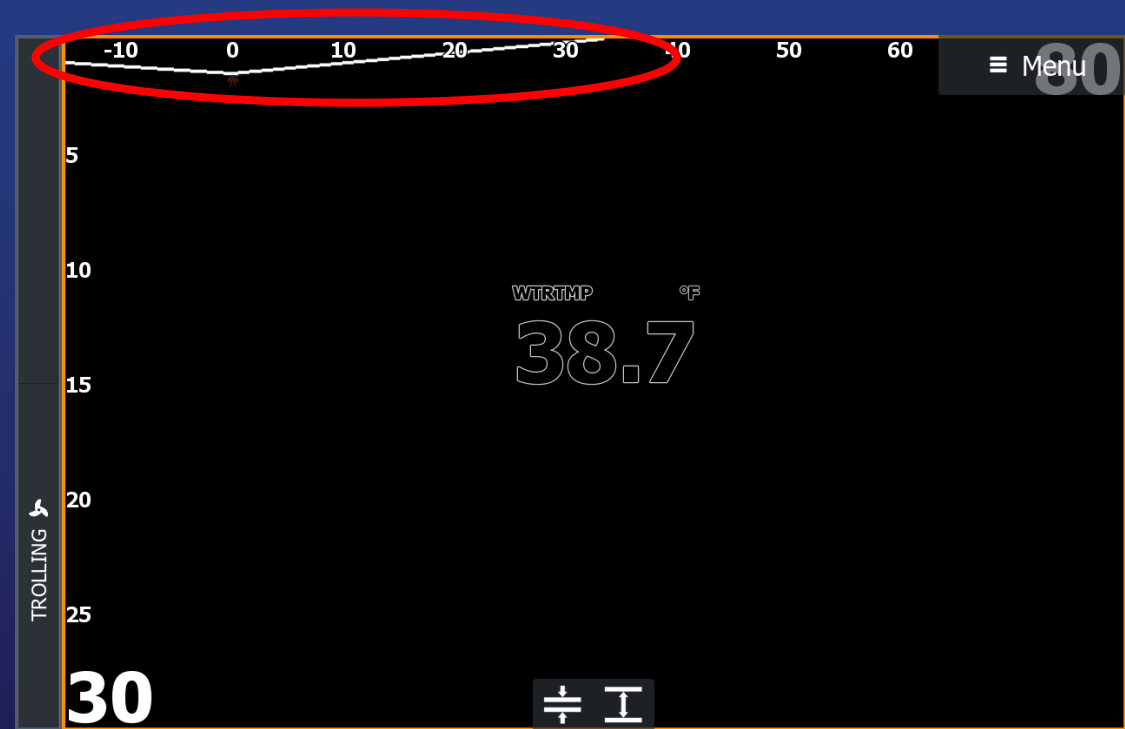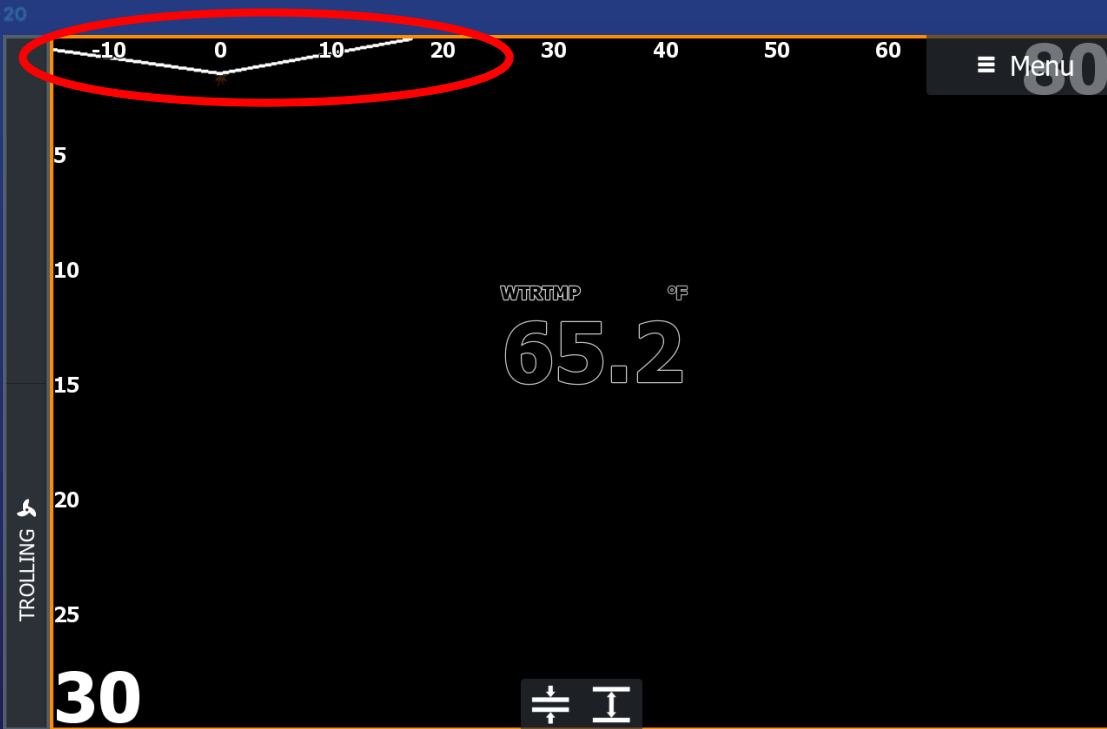


50



ACTIVETARGET[®] 2 XL | SCOUT LIVE 360

Two paired ActiveTarget 2 XL systems and an HDS Pro display unlocks the industry's first Scout Live 360 view, allowing you to make the perfect cast without having to move your boat.

Scout Live 360 view is shown on the **AT Wide** app found on the home screen of the HDS Pro display once two ActiveTarget 2 modules are detected on the network.

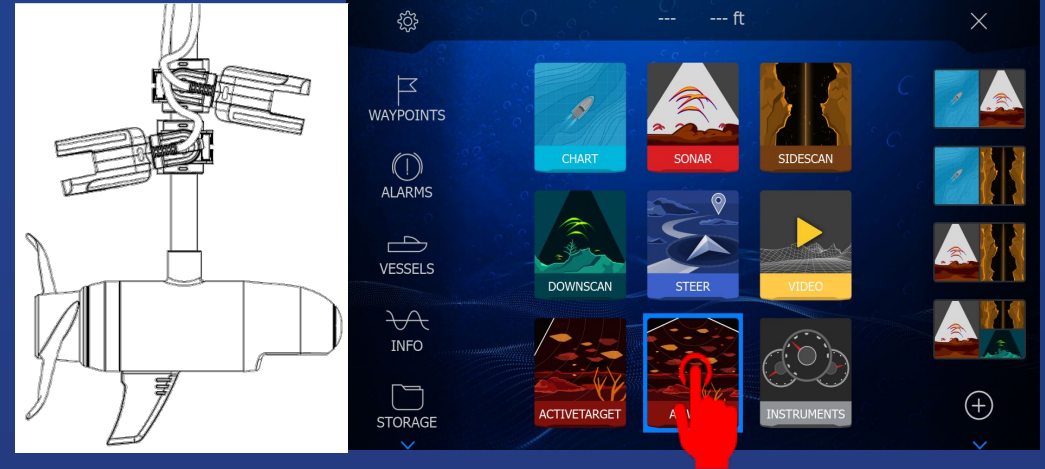

Once the Scout Live 360 View is displayed, verify that the image of the underwater scene is accurate and objects are placed correctly in correlation to the vessel. If the scene is not correct, select **Swap transducer** or **Flip view** until corrected.

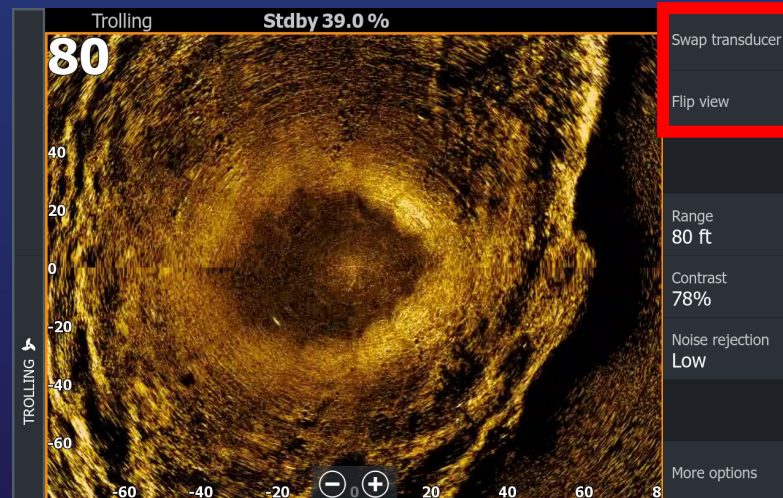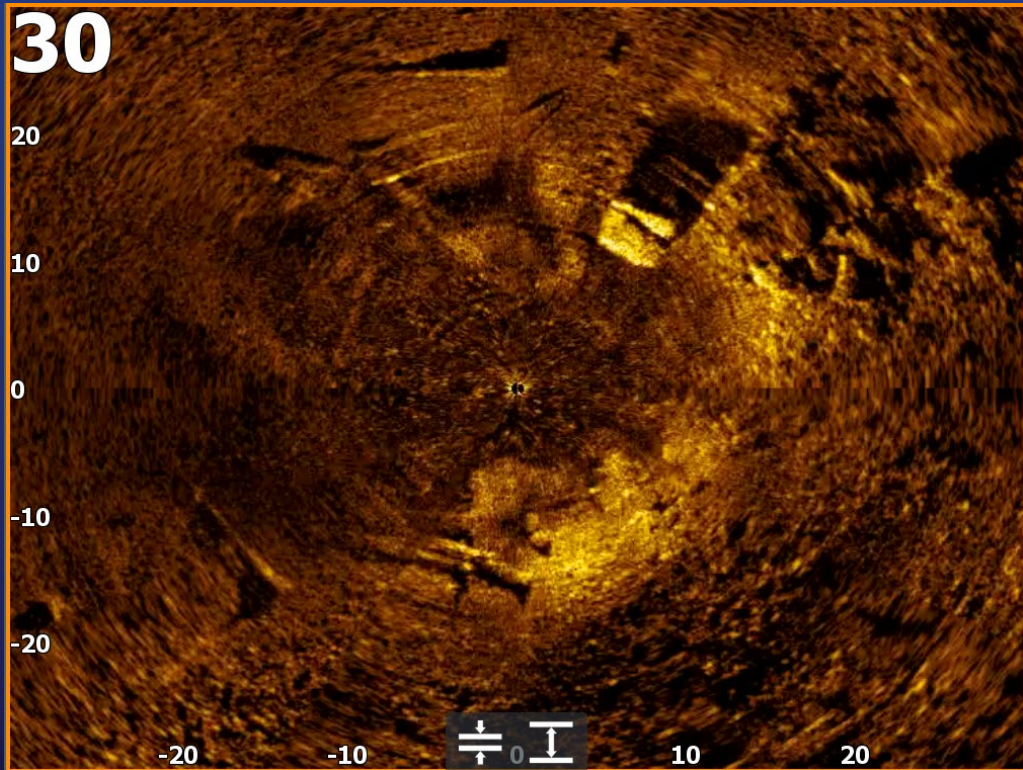

Note: It is best to view a known structure, like a boat ramp or other object sticking above the water surface, to determine if the setup is correct and the composite image is rendered properly.

ACTIVETARGET® 2 XL | SCOUT LIVE 360 PAIRING & UNPAIRING


When on the same network, the ActiveTarget® 2 pairing wizard will automatically display. Pairing can be achieved by selecting the Scout Live 360 image and clicking Configure now or by clicking Later and following the steps below in the Sonar settings menu.

The Scout Live 360 view is only available in the ActiveTarget® Wide app. You must Unpair if you want to use both ActiveTarget® 2 XL's as standalone systems in the ActiveTarget® app.




Note:

Pairing is not supported when one ActiveTarget® 2 and one ActiveTarget® 2 XL are being used on the same network.

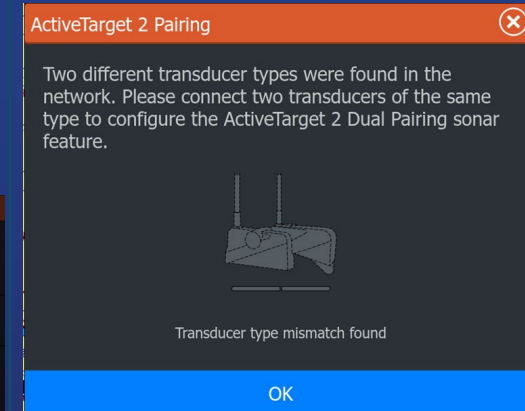


The dialogue above will be shown if two ActiveTarget transducers are detected that cannot be paired.

To Pair:

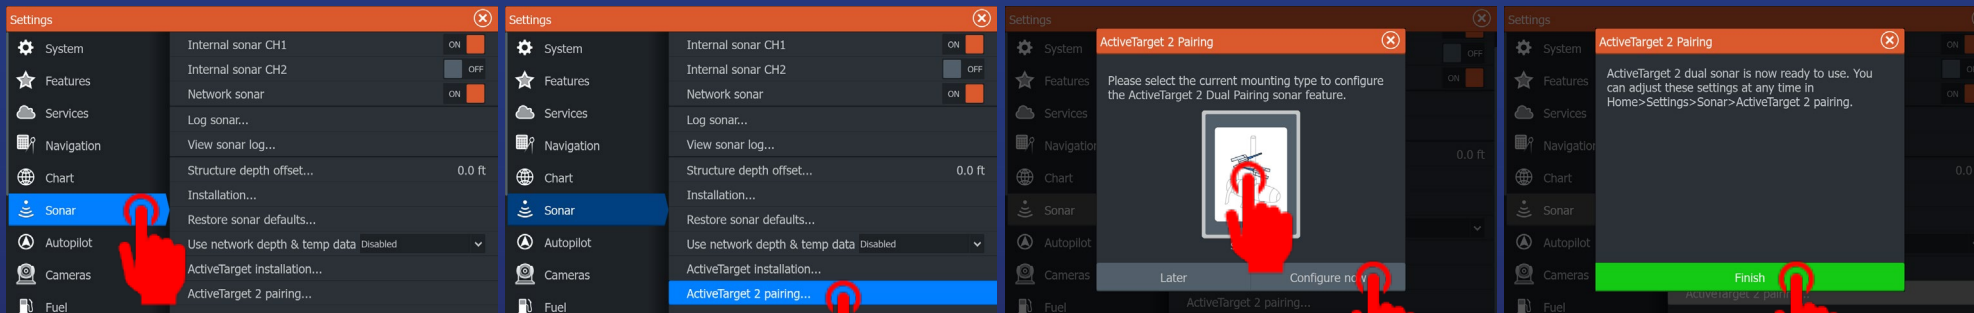

To Unpair:

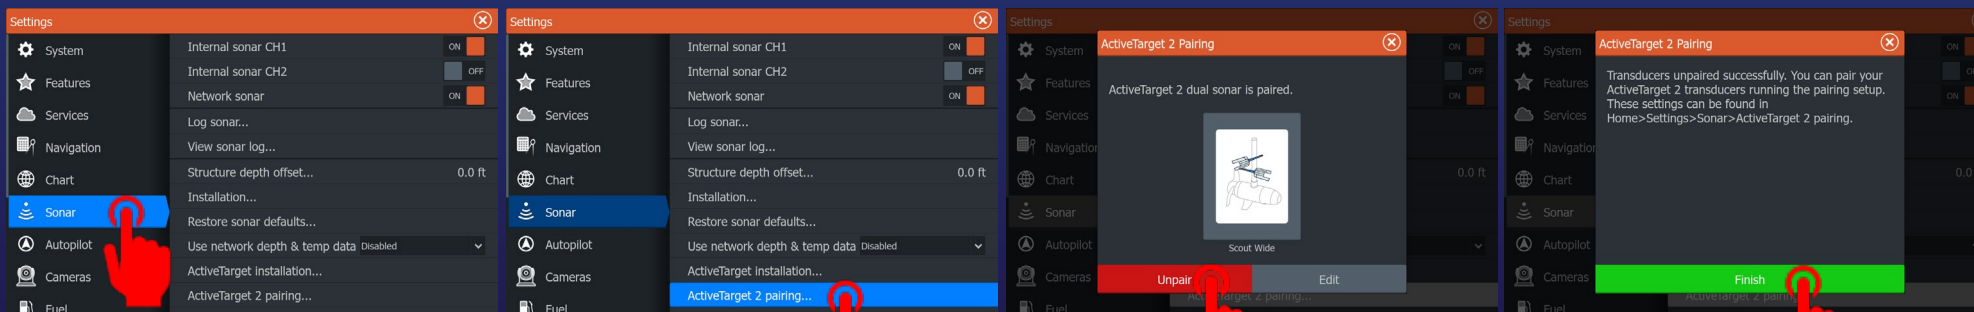



ActiveTarget[®] Improvements

LOWBRANCE[®]


ACTIVETARGET® IMPROVEMENTS | IMAGE QUALITY FOR NOISE REJECTION “OFF”

In this new software version, the “Off” noise rejection setting has been improved to reduce clutter and noise on the screen. This allows for structure, fish and your bait to be more visible on the screen.

Previous Software



NEW 26.1 Software

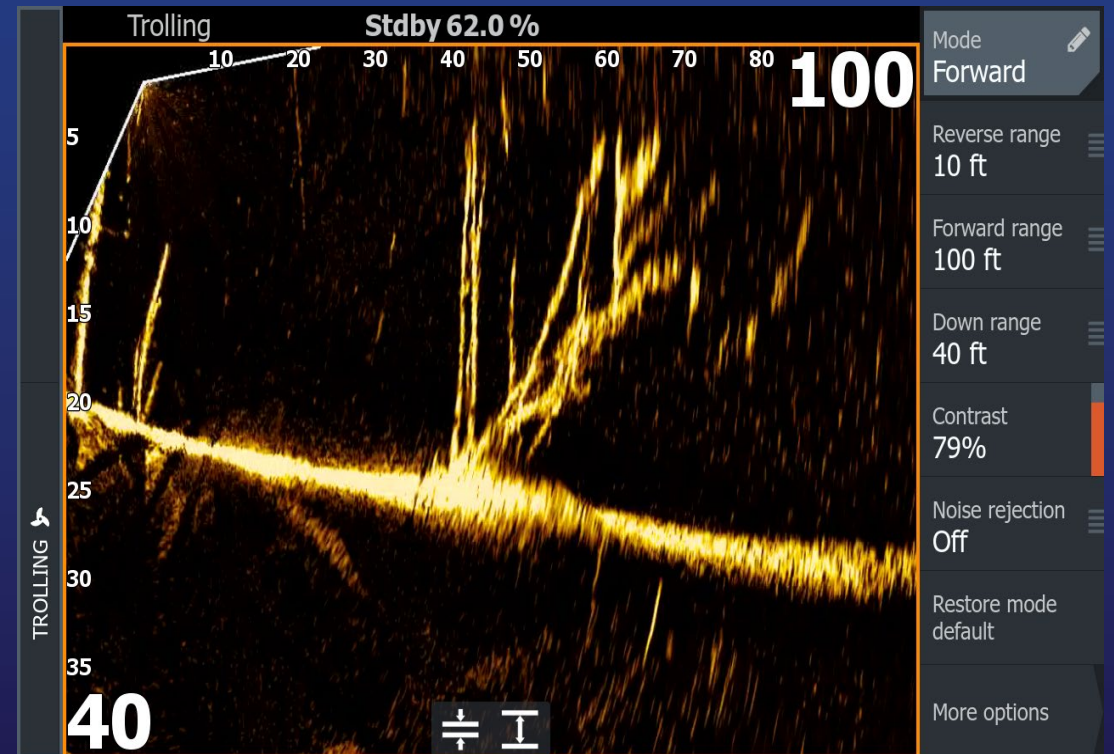


ACTIVETARGET® BEAM INDICATOR ICON IMPROVEMENTS

The ActiveTarget® beam indicator has been improved to more accurately represent the look direction of the ActiveTarget® transducer. This allows you to accurately locate and cast to your targets. Previously, if there was not an external compass sensor on the network, the indicator used the calculated vessel heading based on COG (course over ground), which resulted in inaccurate or erratic behavior when sitting idle or moving at slow speeds.

An external compass, connected to the multi-function display via the NMEA 2000® network, is recommended for optimal performance. When a compass is on the network, the beam indicator will be shown in reference to the vessel heading. I.e., if the transducer is pointed in the same direction as the vessel heading, the indicator will be pointed towards the top of the screen.

If connected to a standalone multi-function display without an external heading sensor, the beam indicator will be shown in reference to cardinal directions. I.e., if the transducer is pointed North, the indicator will be pointed towards the top of the screen regardless of the vessel heading.

The beam indicator can be further optimized, if required, by applying a Heading offset in the ActiveTarget® installation dialog. The Heading offset is limited to $\pm 10^\circ$.

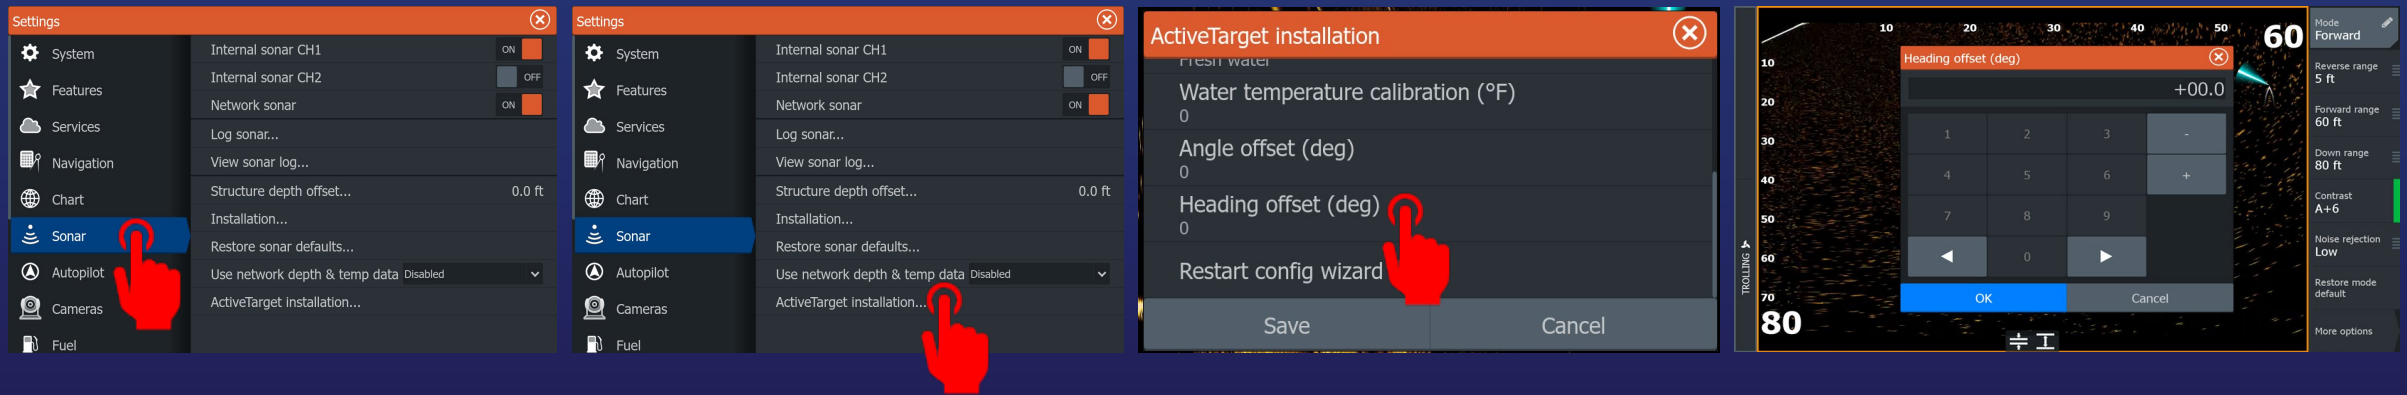

ACTIVETARGET[®] AUTO RANGING FIX

10 In previous software versions, ActiveTarget[®] sometimes “Auto ranged” even when the range was set to a fixed manual value. This was caused by the ActiveTarget[®] source in the Sonar app being set to “Auto”.

Prior to this new version, the Auto depth range for the ActiveTarget[®] source in the Sonar and DownScan Imaging[™] app needed to be disabled to prevent the occasional auto ranging behavior.

20 This new software version fixes this bug and ActiveTarget[®] no longer auto ranges when a fixed manual range is set in the ActiveTarget[®] app.

30

40

50



Other
Improvements




LOWRANCE®

CHIRP IMPROVEMENTS ON SELECT AIRMAR® TRANSDUCERS

Sensitivity and target return strength improvements when using AIRMAR® High Wide and Medium chirp.

Previous Software

NEW 26.1 Software

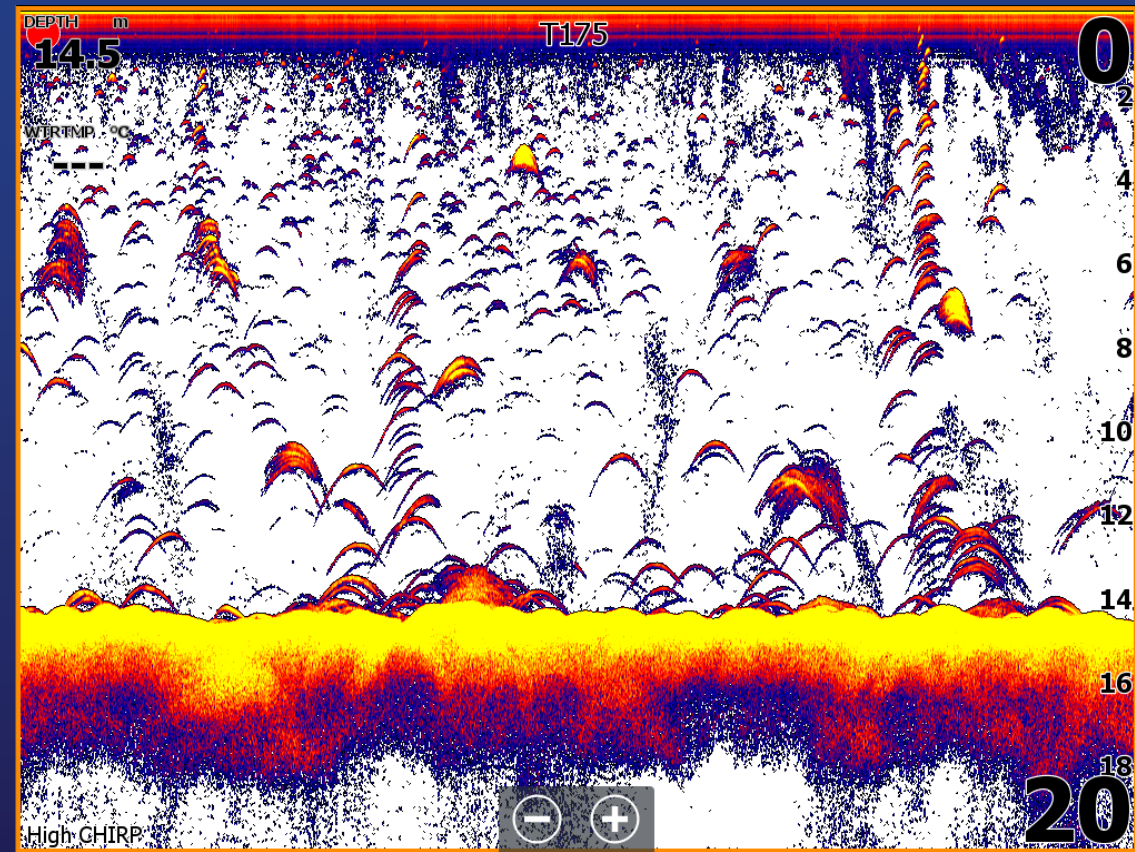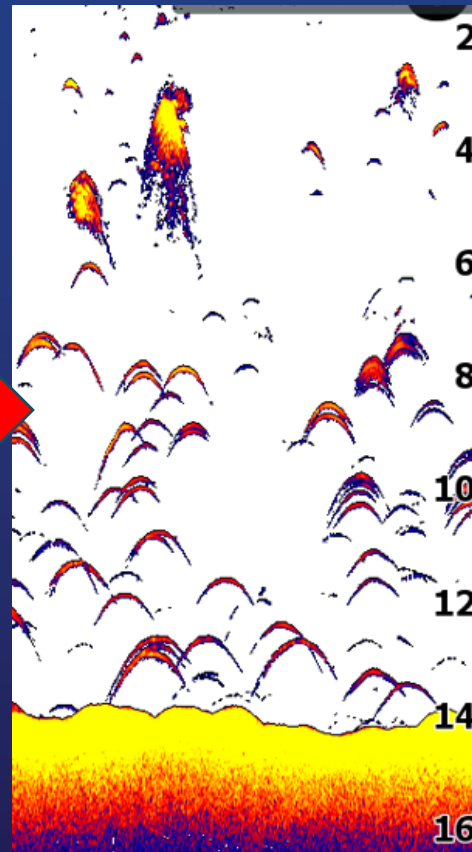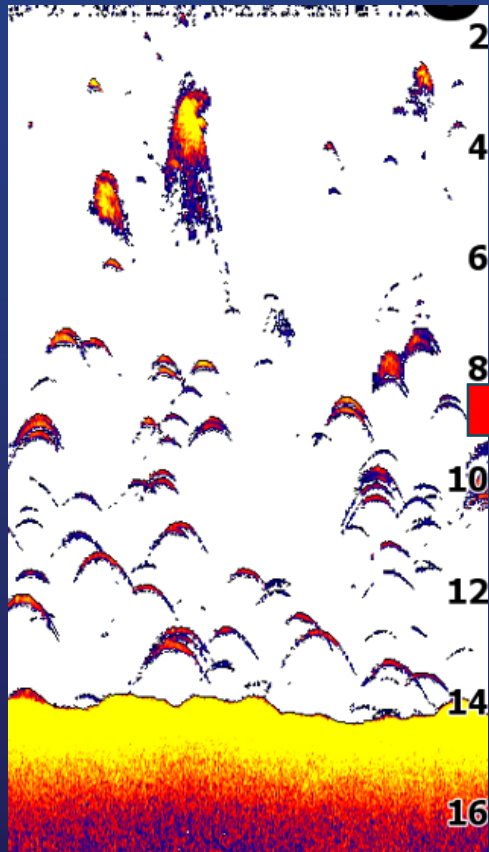

STRUCTURESCAN® 3D COMPATIBILITY WITH SIMRAD NSX® & NSS® 4




Simrad NSX® and NSS® multi-function displays can now use StructureScan® 3D as a source for DownScan Imaging™ and SideScan imaging only. The 3D functionality is not supported.

Simrad NSX® and NSS® multi-function displays must be updated to the latest 2.3 software update from earlier this year.

The StructureScan® 3D sonar module must be updated to this new 26.1 software version.

The module **MUST** be updated from one of the following devices:

- HDS® Gen3, HDS® Carbon, HDS® Live, HDS® Pro
- Elite FS®
- NSS® Evo2, NSO® Evo2, NSS® Evo3, NSO® Evo3

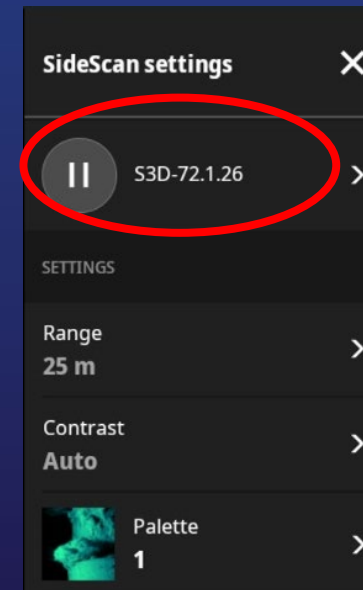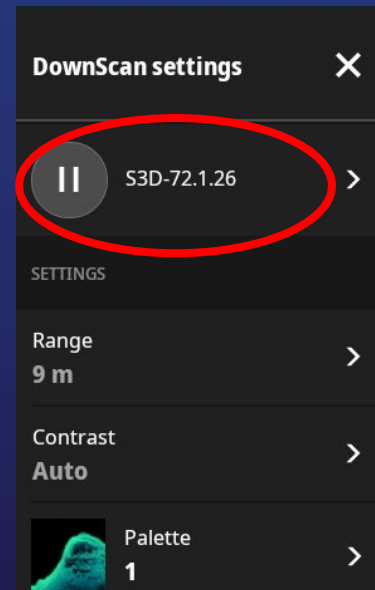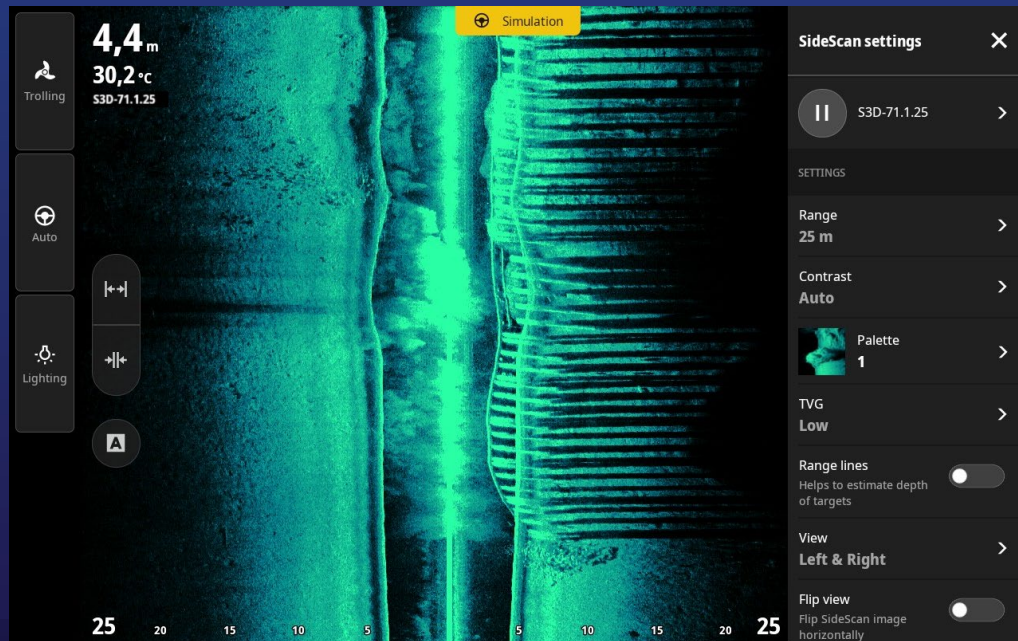

DOWNLOAD INFORMATION

10 The latest software version is available to download from

20 <https://www.lowrance.com/downloads/>

MFD software files:

EliteFS-26.1-72.1.28-Standard-1.upd

30 HDS_Carbon-26.1-72.1.28-Standard-1.upd

HDS_Live-26.1-72.1.28-Standard.upd

HDS_PRO-26.1-72.1.28-Standard-1.upd

Sonar Module software:


40 ActiveTarget-26.1-72.1.28-Standard-1.riv

S3100-26.1-72.1.28-Standard-1.riv

S5100-26.1-72.1.28-Standard-1.riv

Sonar_Hub-26.2-72.1.28-Standard-1.riv

StructureScan3D-26.2-72.1.28-Standard-1.riv

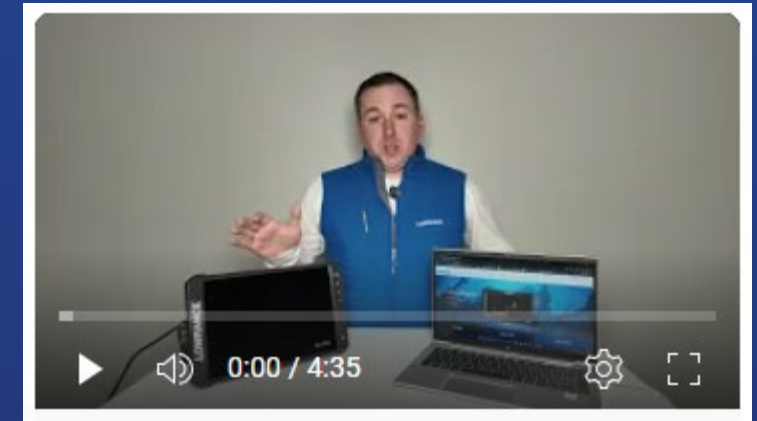

[How to update software](#)