

ProTournament *elite series*³



TurboCharge Technology & Power Flow Cooling*

Available on 360 and 500 models

Fastest Charge Times with Distributed-On-Demand™ Technology

Full Output 5-Stage Digital Performance Charging

Fully automatic multi-stage charging: analyzing, charging, conditioning, auto maintain (energy saver mode) and once a month storage recondition mode.

Digital LED Display with Dual Function Battery Status Monitor

Individual battery charge level monitor with an on-the-water push-to-test feature for percent of battery power remaining. Eliminate time consuming trouble shooting by indicating system OK or specific batteries requiring attention.

Auto Maintain / Energy Saver Mode

4 Selectable Charge Profiles with Temperature Compensation
Standard and High Performance (HP) charge profiles: Flooded/Absorbed Glass Mat (AGM) batteries, HP AGM 1 for pure lead AGM's, HP AGM 2 for pure lead AGM's, or LiFePO4** for approved LiFePO4 batteries. Only charge ProMariner approved LiFePO4 batteries.




Tri-Surface Heat Sink Design

New! 50 Amp 5 Bank and 24 Amp 4 Bank Models Available

*Patent pending

**See manual or promariner.com/Li for approved LiFePO4 batteries and warnings.

Available in Six Models

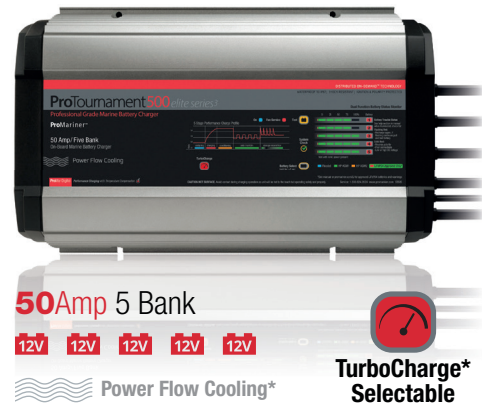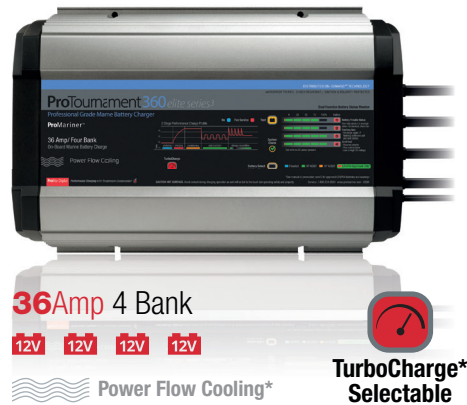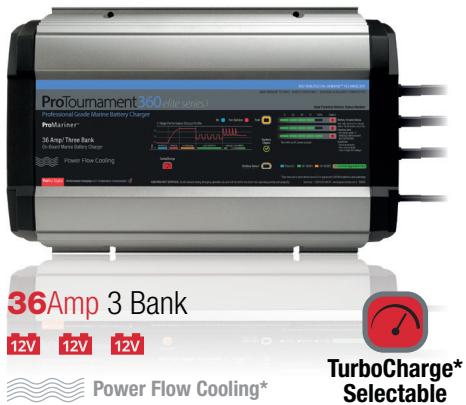

Part No.	Model	DC System Voltage	Amps	No. Batteries	AC & DC Cables	Size (H x W x D)	Weight	VAC/Max Amps	AC Plug
53242	ProTournament240 Two Bank	12/24	24	2	6'	7.1" x 3.2" x 13.4"	9.0 lbs	120 +/- 10% VAC / 7.5 A	NEMA 5-15
53243	ProTournament240 Three Bank	12/24/36	24	3	6'	7.1" x 3.2" x 13.4"	9.5 lbs	120 +/- 10% VAC / 7.5 A	NEMA 5-15
53244	ProTournament240 Four Bank	12/24/36/48	24	4	6'	7.1" x 3.2" x 13.4"	9.9 lbs	120 +/- 10% VAC / 7.5 A	NEMA 5-15
53363	ProTournament360 Three Bank	12/24/36	36	3	6'	9.3" x 4.2" x 13.7"	15.4 lbs	120 +/- 10% VAC / 10 A	NEMA 5-15
53364	ProTournament360 Four Bank	12/24/36/48	36	4	6'	9.3" x 4.2" x 13.7"	15.8 lbs	120 +/- 10% VAC / 10 A	NEMA 5-15
53505	ProTournament500 Five Bank	12/24/36/48 + Eng	50	5	6'	9.3" x 4.2" x 13.7"	16.9 lbs	120 +/- 10% VAC / 13 A	NEMA 5-15
53600	Optional Remote with Waterproof Connection Port								

**Only charge approved LiFePO4 batteries. See manual or promariner.com/Li for approved LiFePO4 batteries and warnings.

Conforms to UL STD. 1236
 Certified to CSA STD. C22.2 No. 107.2
 FCC Class B, CEC and DOE Listed
 Designed and constructed to ABYC A-31



Note: For use with Group 24 through 31 Flooded (lead-acid), AGM and LiFeO4** approved batteries. Not for use 4D or 8D large capacity batteries. For these applications, see ProMariner's ProNauticP Series.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Specifications subject to change without notice.

